


ODBC

Steel core blind flange, PP/FRP coated, according to EN/ISO/DIN. Drilling PN 10/16 up to d160/180, PN 10 from d200/225 to d400

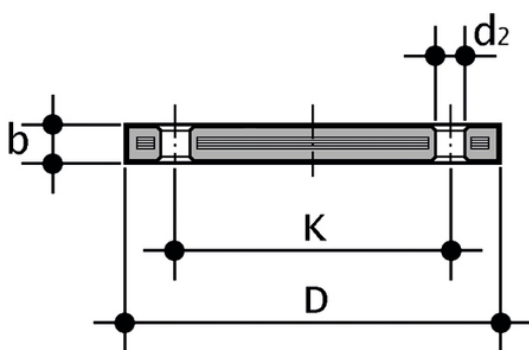

Objednací číslo	d	DN	product.detail.attribute.*PMA (bar)	product.detail.attribute.b	D	product.detail.attribute.d[5:2]	product.detail.attribute
ODBC020	20	15	10	16	14	95	65
ODBC025	25	20	10	12	18	105	75
ODBC032	32	25	10	18	14	115	85
ODBC040	40	32	10	17	18	140	100
ODBC050	50	40	10	18	18	150	110
ODBC063	63	50	10	18	18	165	125
ODBC075	75	65	10	18	18	185	145
ODBC090	90	80	10	20	18	200	160
ODBC110	110/125	100	10	20	18	220	180
ODBC140	140	125	10	24	18	250	210
ODBC160	160/180	150	10	22	22	285	240
ODBC200	200/225	200	10	24	22	340	295
ODBC250	250/280	250	10	30	22	395	350
ODBC315	315	300	10	34	22	445	400
ODBC355	350	350	10	39	22	505	460
ODBC400	400	400	10	46	25	574	515