


# VKDFC – Valvola a sfera a due vie

## Dual Block® DUAL BLOCK® 2-WAY BALL VALVE

DUAL BLOCK® 2-way ball valve with BSP threaded female ends

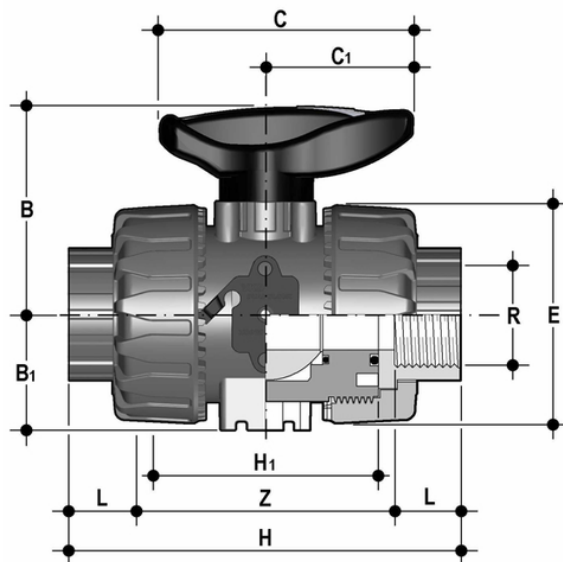

### EPDM

Objednací číslo	product.detail.attribute.R	DN	PN	B	B (5:1)	C	C (5:1)	E	H	H (5:1)	L	Z	g
VKDFC012E	1/2"	15	16	54	29	67	40	54	111	65	17,8	75,4	228
VKDFC034E	3/4"	20	16	65	34,5	85	49	65	117	70	18	81	364
VKDFC100E	1"	25	16	69,5	39	85	49	73	135	78	22,6	89,8	487
VKDFC114E	1" 1/4	32	16	82,5	46	108	64	86	153	88	25,1	102,8	737
VKDFC112E	1" 1/2	40	16	89	52	108	64	98	156	93	24,7	106,6	1040
VKDFC200E	2"	50	16	108	62	134	76	122	186	111	29,6	126,8	1815

### FKM

Objednací číslo	product.detail.attribute.R	DN	PN	B	B (5:1)	C	C (5:1)	E	H	H (5:1)	L	Z	g
VKDFC012F	1/2"	15	16	54	29	67	40	54	110	65	15	80	210
VKDFC034F	3/4"	20	16	65	34,5	85	49	65	116	70	16	83	335
VKDFC100F	1"	25	16	69,5	39	85	49	73	134	78	19	96	448
VKDFC114F	1" 1/4	32	16	82,5	46	108	64	86	153	88	21	110	678
VKDFC112F	1" 1/2	40	16	89	52	108	64	98	156	93	21	113	955
VKDFC200F	2"	50	16	108	62	134	76	122	186	111	26	135	1667

# VKDFC – Valvola a sfera a due vie

## Dual Block<sup>®</sup> DUAL BLOCK<sup>®</sup> 2-WAY BALL VALVE

FIP has developed a VKD DUAL BLOCK<sup>®</sup> ball valve to introduce a high reference standard in thermoplastic valve design. VKD is a True Union ball valve that meets the most stringent needs required by industrial applications.

- Ergonomic HIPVC handle equipped with **removable tool to adjust the ball seat carrier**.
- **Handle lock 0° – 90° SHKD** (available as an accessory) ergonomically operable during service and padlockable
- Robust **integrated bracket for valve anchoring**, for easy and quick automation even after valve installation on the system via the Power Quick module (optional)
- **DUAL BLOCK<sup>®</sup>** patented lock system that ensures union nut tightening hold even in severe conditions such as vibrations or heat dilation
- Machined high surface finish ball that guarantees a smooth operation and increased reliability
- Connection system for solvent weld, threaded and flanged joints
- Patented **SEAT STOP<sup>®</sup>** ball carrier system that lets you micro-adjust ball seats and minimise the axial force effect
- Easy radial dismounting allowing quick replacement of O-rings and ball seats without any need for tools
- **PN16 True Union valve body** made for rigid PVC-U injection moulding equipped with built-in bores for actuation. ISO 9393 compliant test requisites
- Option of dismounting downstream pipes with the valve in the closed position
- Floating **full bore ball** with high surface finish
- **Integrated bracket** for valve anchoring
- Ball seat carriers can be adjusted using the **Easytorque adjustment kit**
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations