


VKRJV/CE 90-240 V AC 4-20 mA - ELECTRICALLY ACTUATED DUAL BLOCK® REGULATING BALL VALVE

2 way 2 way DUAL BLOCK® regulating ball valve with female ends for solvent welding, JIS series with multivolt electric modulating actuator 90-240 V AC 50-60 Hz

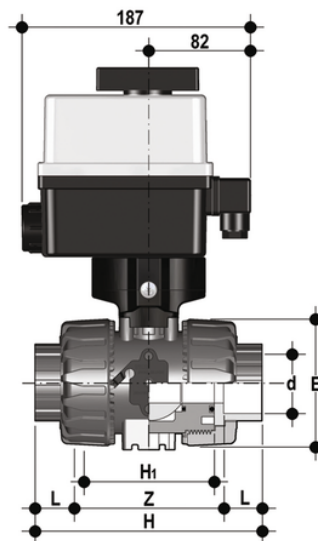

EPDM

Objednací číslo	d	DN	PN	E	H	product.detail.attribute.H1	L	Z	B	product.detail.attribute.B1	g
VKRJVEM012EOE	1/2"	15	16	54	131	65	30	71	205	29	1775
VKRJVEM112FOE	1" 1/2	40	16	98	212	93	55	102	244	52	2601
VKRJVEM114FOE	1" 1/4	32	16	86	182	88	44	94	238	46	2369
VKRJVEM100FOE	1"	25	16	73	164	78	40	84	221	39	2011
VKRJVEM034FOE	3/4"	20	16	65	147	70	35	77	216	34.5	1903
VKRJVEM012FOE	1/2"	15	16	54	131	65	30	71	205	29	1775
VKRJVEM200EOE	2"	50	*10	122	248	111	63	122	261	62	3218
VKRJVEM112EOE	1" 1/2	40	16	98	212	93	55	102	244	52	2601
VKRJVEM114EOE	1" 1/4	32	16	86	182	88	44	94	238	46	2369
VKRJVEM100EOE	1"	25	16	73	164	78	40	84	221	39	2011
VKRJVEM034EOE	3/4"	20	16	65	147	70	35	77	216	34.5	1903
VKRJVEM200FOE	2"	50	*10	122	248	111	63	122	261	62	3218

VKRJV/CE 90-240 V AC 4-20 mA – ELECTRICALLY ACTUATED DUAL BLOCK[®] REGULATING BALL VALVE

In addition to the manually actuated version, VKR is also available in electrically actuated VKR/CE configuration. Actuators are firmly connected to the valve by the special FIP Power Quick modules fully made of PP-GR technopolymer. VKR/CE are constructed with actuators meeting current regulations and selected by FIP according to their quality and reliability requirements. The efficiency of these valves, tested according to the company's quality standards, is guaranteed by the expertise and know-how that FIP dedicates to manufacturing its products.

- Electric modulating actuator constructed according to FIP specifications; with plastic shell and standard emergency override. Available with voltages from 12 to 240V with 4-20mA and 0-10 V input.
- High surface finish stem with double O-Ring. The double connection key system guarantees solid and reliable actuator torque transmission to the ball.
- Easy to install PowerQuick module for pneumatic or electric actuator fully made of highly robust technopolymer.
- The patented ball design provides linear flow regulation throughout its range of operation even when the valve is open just a few degrees and guarantees minimum pressure drops.
- Patented DUAL BLOCK[®] system: prevents union nuts from loosening even under extreme operating conditions: e.g. vibration or thermal expansion.
- Joint system for solvent welding (PVC-U only), for welding (PP-H and PVDF only), for threading and flanging
- Patented SEAT STOP[®] ball carrier system that lets you micro-adjust ball seats and minimise the axial force effect.
- Easy radial disassembly allowing quick replacement of O-rings and ball seats without any need for tools
- Radial dismounting valve body (True Union) made for PVC-U, PVC-C and PVDF-H injection moulding equipped with built-in bores for actuation. ISO 9393 compliant test requisites
- Option of disassembling downstream pipes with the valve in the closed position
- High surface finish stem with double O-Ring and double groove ball connection
- Integrated bracket for valve anchoring
- Ball seat carrier can be adjusted using the Easytorque adjustment kit
- Actuation option: version with electric modulating actuator with 4-20 mA / 0-10 V inlet and 4-20 mA / 0-10 V outlet to monitor the position
- Valve suitable for carrying fluids that are clean and free of suspended particles.