


VKRIM - DUAL BLOCK[®] regulating ball valve

DUAL BLOCK[®] regulating ball valve with female ends for socket welding, metric series

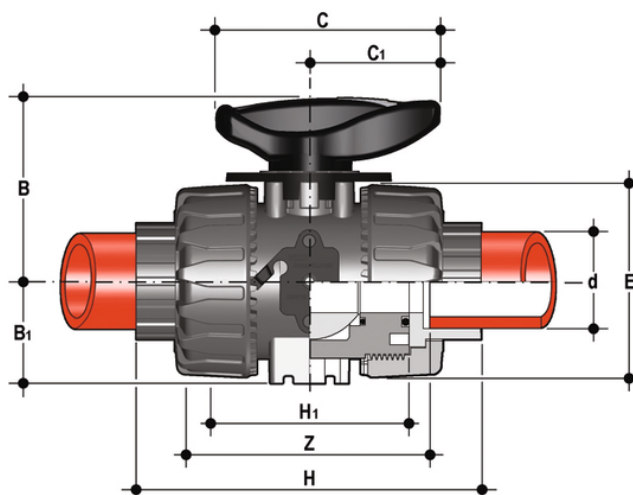

EPDM

Objednací číslo	d	DN	PN	B	B (5:1)	C	C (5:1)	E	H	H (5:1)	Z
VKRIM016E	16	10	10	54	29	67	40	54	102	65	74,5
VKRIM020E	20	15	10	54	29	67	40	54	102	65	73
VKRIM025E	25	20	10	65	34,5	85	49	65	114	70	82
VKRIM032E	32	25	10	69,5	39	85	49	73	126	78	90
VKRIM040E	40	32	10	82,5	46	108	64	86	141	88	100
VKRIM050E	50	40	10	89	52	108	64	98	164	93	117
VKRIM063E	63	50	10	108	62	134	76	122	199	111	144

FKM

Objednací číslo	d	DN	PN	B	B (5:1)	C	C (5:1)	E	H	H (5:1)	Z
VKRIM016F	16	10	10	54	29	67	40	54	102	65	74,5
VKRIM020F	20	15	10	54	29	67	40	54	102	65	73
VKRIM025F	25	20	10	65	34,5	85	49	65	114	70	82
VKRIM032F	32	25	10	69,5	39	85	49	73	126	78	90
VKRIM040F	40	32	10	82,5	46	108	64	86	141	88	100
VKRIM050F	50	40	10	89	52	108	64	98	164	93	117
VKRIM063F	63	50	10	108	62	134	76	122	199	111	144

VKRIM – DUAL BLOCK[®] regulating ball valve

The VKR DUAL BLOCK[®] valve combines high reliability and safety aspects typical of VKD full bore ball valves with the new flow adjustment function with typical linear curve that meets the most stringent needs typical of industrial applications.

- HIPVC ergonomic multifunctional handle with **position indicator** and tool to adjust the ball seat carrier
- Flow direction and opening angle indication plate with **graduated scale with 5° detail** for clear and accurate readings
- 90° operating angle that permits **the use of standard** quarter turn **actuators**
- The patented ball design provides **linear flow adjustment** throughout its range of operation even when the valve is open just a few degrees and guarantees minimum pressure drops
- Patented **DUAL BLOCK[®]** system: prevents union nuts from loosening even under extreme operating conditions: e.g. vibration or thermal expansion
- Connection system for solvent weld, threaded and flanged joints
- Patented **SEAT STOP[®]** ball carrier system that lets you micro-adjust seals and minimise the axial force effect
- Easy radial dismounting allowing quick replacement of O-rings and ball seats without any need for tools
- **PN16 True Union valve body** made for rigid PVC-U injection moulding equipped with built-in bores for actuation. ISO 9393 compliant test requisites
- Option of dismounting downstream pipes with the valve in the closed position
- High surface finish stem with double O-Ring and double connection key to ball
- **Integrated bracket** for valve anchoring
- Ball seat carrier can be adjusted using the **Easytorque adjustment kit**
- Actuation option: version with electric modulating actuator with 4-20 mA / 0-10 V inlet and 4-20 mA / 0-10 V outlet to monitor the position
- Valve suitable for carrying fluids that are clean and free of suspended particles