


FKOM/FM - Butterfly valve

Butterfly valve with bare shaft

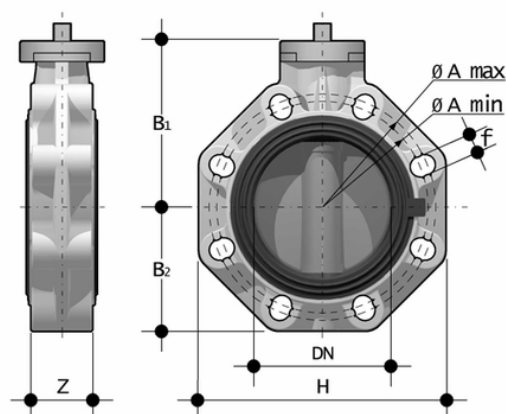

EPDM

Objednáací číslo	product.detail.attribute.d - Size	DN	PN	product.detail.attribute.A min	product.detail.attribute.A max	product.detail.attribute.øA	B (5:1)	product
FKOMFM050E	50 - 1½"	40	10	99	109	-	106	60
FKOAMFM814E	14"	***350	7	-	-	476	330	280
FKOAMFM812E	12"	***300	8	-	-	432	305	245
FKOAMFM810E	10"	***250	10	-	-	362	248	210
FKOMFM400E	400*	**400	6	-	-	515	350	306
FKOMFM355E	355*	**350	7	-	-	460	330	280
FKOMFM315E	315*	**300	8	-	-	400	305	245
FKOMFM280E	250*/280*	**250	10	-	-	350	248	210
FKOMFM225E	200*/225* - 8"	200	10	280	298	-	227	161
FKOMFM160E	160*/180 - 6"	150	10	230	242	-	180	134
FKOMFM140E	125/140 - 5"	125	10	204	215	-	167	120
FKOMFM110E	110 - 4"	100	10	165	190	-	147	107
FKOMFM090E	90 - 3"	80	10	145	160	-	133	93
FKOMFM075E	75 - 2½"	65	10	128	144	-	119	80
FKOMFM063E	63 - 2"	50	10	115	126	-	112	70
FKOAMFM816E	16"	***400	6	-	-	540	350	306

FKOM/FM – Butterfly valve

FKM

Objednací číslo	product.detail.attribute.d – Size	DN	PN	product.detail.attribute.A min	product.detail.attribute.A max	product.detail.attribute.øA	B (5:1)	product
FKOMFM050F	50 – 1½"	40	10	99	109	–	106	60
FKOAMFM814F	14"	***350	7	–	–	476	330	280
FKOAMFM812F	12"	***300	8	–	–	432	305	245
FKOAMFM810F	10"	***250	10	–	–	362	248	210
FKOMFM400F	400*	**400	6	–	–	515	350	306
FKOMFM355F	355*	**350	7	–	–	460	330	280
FKOMFM315F	315*	**300	8	–	–	400	305	245
FKOMFM280F	250*/280*	**250	10	–	–	350	248	210
FKOMFM225F	200*/225* – 8"	200	10	280	298	–	227	161
FKOMFM160F	160*/180 – 6"	150	10	230	242	–	180	134
FKOMFM140F	125/140 – 5"	125	10	204	215	–	167	120
FKOMFM110F	110 – 4"	100	10	165	190	–	147	107
FKOMFM090F	90 – 3"	80	10	145	160	–	133	93
FKOMFM075F	75 – 2½"	65	10	128	144	–	119	80
FKOMFM063F	63 – 2"	50	10	115	126	–	112	70
FKOAMFM816F	16"	***400	6	–	–	540	350	306

FKOM/FM – Butterfly valve

The FK is a butterfly valve for shutting off or regulating flow, with structural characteristics that make it ideal for industrial applications requiring high performance and longterm reliability. This valve is also equipped with the customisable Labelling System.

- **Ergonomic handle** in HIPVC equipped with **locking and unlocking device, release, quick operation and graduated adjustment** in 10 intermediate positions (DN 40÷200). The operating range, starting from the first few degrees of valve opening, also guarantees extremely low pressure drops.
- **Customisable Labelling System:** integrated module in the handle, made of a transparent protection plug and a customisable tag holder using the LSE set (available as an accessory). The **customisation** lets you **identify the valve on the system** according to specific needs.
- **STAINLESS steel square section stem** completely isolated from the fluid complying with standard ISO 5211: DN 40÷65: 11 mm DN 80÷100: 14 mm DN 125÷150: 17 mm DN 200: 22 mm DN 250÷400: 27 mm
- **Body** in polypropylene based **compound reinforced with fibreglass (PP-GR)** **resistant to UV rays** and characterised by **high mechanical strength**.
- **Drilling pattern using oval slots** that allow coupling to flanges according to numerous international standards. The special **self-centring inserts in ABS** supplied for DN 40÷200 guarantee the **correct axial alignment** of the valve during installation. For DN 250÷400 valves, the drilling pattern for the selfcentring system is of the traditional type according to DIN and ANSI standards.
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- Interchangeable Disk in PP-H with through shaft, available in different thermoplastic materials: PVC-U, PVC-C, ABS, PVDF Overall dimensions of the valve in accordance with standard ISO 5752 (DN 40÷200 Medium series 25, DN 250÷ 300 Long Series 16) and DIN 3202 K2 and ISO 5752 (DN DN 65÷200 K2, DN 250÷300 K3) Can also be installed as an end line valve, bottom discharge valve or tank dump valve **Special Lug version** PN 10 fully drilled according to DIN 2501 or ANSI B16.5 cl.150 **with molded-in AISI 316 stainless steel threaded inserts** **Valve material compatibility** (PP-H) with water conveyance, drinking water and other food substances according to current **regulations** Possibility of installing a manual reducer or pneumatic and/or electric actuators by applying an ISO standard drilling PP-GR flanges. DN 40 ÷ 200 valve equipped with plate with rack in PP-GR. For actuated versions with flange drilled according to ISO 5211 F05, F07, F10. DN 250÷300 valve, fitted with one-piece top flange in high mechanical strength PP-GR with mounting flange for internal components drilled according to standard ISO 5211 F10 (excluding DN 350÷400), F12, F14. Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations