


C6.30

C-PVC Inductive Conductivity Transmitter with Temperature Sensor (Pt100) included

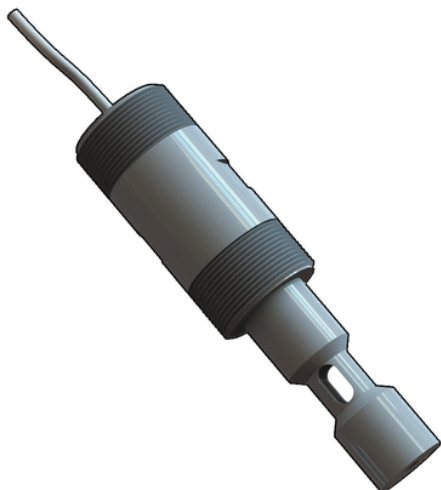

Objednací číslo	product.detail.attribute.Description	product.detail.attribute.Applications/ Operative Range	product.detail.attribute.Connection	product.detail.c
C6.30.01	Pt100 included	0-10 mS/cm	3 m	1 1/2" NPT
C6.30.02	Pt100 included	0-100 mS/cm	3 m	1 1/2" NPT
C6.30.03	Pt100 included	0-1000 mS/cm	3 m	1 1/2" NPT

C6.30

- APPLICATIONS • Water treatment • Waste water treatment • Cooling towers • Scrubber systems • Metal finishing Coating and corrosion fluid measurement MAIN FEATURES • Corrosion & coating resistant • Compact transmitter • No calibration required • Easy installation • Pt100 sensor integrated • Suitable for submersible installation