


FOR QRV AND QPV

Steel core backing ring, PP/FRP coated, according to EN/ISO/DIN for stubs QRV and QPV (Drilling: PN 10/16 up to DN 150; PN 10 from DN 200) and for stubs QRC.

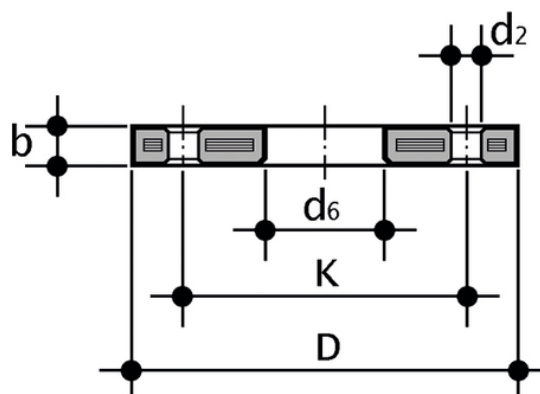

Objednací číslo	Materiál	Kategorie	d	DN	product.detail.attribute.PMA (bar)	product.detail.attribute.b	D	product.detail.at
SWODBD140DN125	FLS Measurement Instrumentation	Příruby	140	125	16	24	252	18
SWODBD225DN200	FLS Measurement Instrumentation	Příruby	225	200	16	27	340	22
SWODBD280DN250	FLS Measurement Instrumentation	Příruby	280	250	16	30	395	22
SWODBD315DN300	FLS Measurement Instrumentation	Příruby	315	300	16	34	445	22