


## C6.30

C-PVC Inductive Conductivity Transmitter with Temperature Sensor (Pt100) included



Objednací číslo	Materiál	Kategorie	product.detail.attribute.family	Série	product.detail.attribute.Description	product.detail.Operative Range
C6.30.01	FLS Measurement Instrumentation	FLS systém pro měření a regulaci	ph / ORP / pressure-level Electrodes	Potenciometry a indukční senzory vodivosti	Pt100 included	0-10 mS/cm
C6.30.02	FLS Measurement Instrumentation	FLS systém pro měření a regulaci	ph / ORP / pressure-level Electrodes	Potenciometry a indukční senzory vodivosti	Pt100 included	0-100 mS/cm
C6.30.03	FLS Measurement Instrumentation	FLS systém pro měření a regulaci	ph / ORP / pressure-level Electrodes	Potenciometry a indukční senzory vodivosti	Pt100 included	0-1000 mS/cm

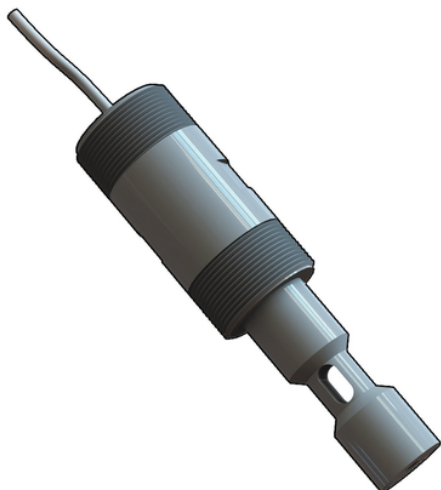

## C6.30

- APPLICATIONS • Water treatment • Waste water treatment • Cooling towers • Scrubber systems • Metal finishing Coating and corrosion fluid measurement MAIN FEATURES • Corrosion & coating resistant • Compact transmitter • No calibration required • Easy installation • Pt100 sensor integrated • Suitable for submersible installation