


CMFV - Compact diaphragm valve

Compact diaphragm valve with BSP threaded female ends

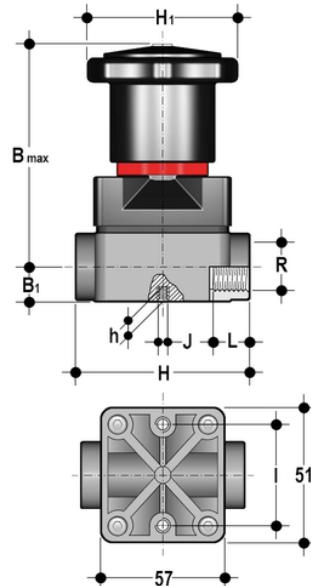

EPDM

Objednací číslo	Materiál	Kategorie	Série	product.detail.attribute.R	DN	PN	product.detail.attribute.B max	B (5:1)	H	H (5:1)	product.detail.attribute.h	prod
CMFV038E	PVC-U system	Armatury	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35
CMFV012E	PVC-U system	Armatury	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35

FKM

Objednací číslo	Materiál	Kategorie	Série	product.detail.attribute.R	DN	PN	product.detail.attribute.B max	B (5:1)	H	H (5:1)	product.detail.attribute.h	prod
CMFV038F	PVC-U system	Armatury	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35
CMFV012F	PVC-U system	Armatury	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35

PTFE

CMFV – Compact diaphragm valve

Objednací číslo	Materiál	Kategorie	Série	product.detail.attribute.R	DN	PN	product.detail.attribute.B max	B (5:1)	H	H (5:1)	product.detail.attribute.h	prod
CMFV038P	PVC-U system	Armatury	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35
CMFV012P	PVC-U system	Armatury	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35

CMFV – Compact diaphragm valve

- Handwheel in PA-GR, completely sealed, high mechanical strength with ergonomic grip for optimum manageability
- Integrated adjustable torque limiter designed to prevent excessive compression of the diaphragm and always guarantee a minimum fluid flow
- Optical position indicator supplied as standard
- Bonnet in PA-GR with STAINLESS steel nuts fully protected by plastic plugs to eliminate zones where impurities may accumulate.
Internal circular and symmetrical diaphragm sealing area
- STAINLESS steel bolts, can also be inserted from above
- Threaded metal inserts for anchoring the valve
- Connection system for solvent weld and threaded joints
- Extremely compact construction
- Internal operating components in metal totally isolated from the conveyed fluid
- Valve stem in STAINLESS steel
- Compressor with floating diaphragm support
- Easy to replace diaphragm seal
- Corrosion-proof internal components
- CDSA (Circular Diaphragm Sealing Angle) system offering the following advantages:
 - uniform distribution of shutter pressure on the diaphragm seal
 - reduction in the tightening torque of the crews fixing the actuator to the valve body
 - reduced mechanical stress on all valve components (actuator, body and diaphragm)
 - easy to clean valve interior
 - low risk of the accumulation of eposits, contamination or damage to the diaphragm due to crystallisation
 - operating torque reduction